

R Series *by ShermannAudio*

RS5 (discontinued)

The Shermann® **RS5** is a compact, lightweight, three way, concert loudspeaker supplied in bi-amp drive format.

The RS5 maintains the highest standards of speech and music reproduction throughout the audio range combining vocal accuracy and clarity with impressive instrumental detail.

Designed by Ken Hughes in December 2001 and launched soon afterwards this powerful, compact model has been used successfully on numerous high-profile gigs and tours.



Weight saving in the robust **RS5** has been achieved through the use of newly developed drivers featuring neodymium magnet assemblies which also have the additional advantages of very high efficiency and low distortion.

A horn-loaded 12" bass/mid drive unit fitted with a neodymium magnet assembly is front mounted into its optimally sized enclosure.

This method of mounting eliminates the requirement for a removable back thereby improving the structural integrity of the cabinet and further reducing weight.

A superb 1" HF driver equipped with a neodymium magnet assembly mounted on a Shermann horn unit and two GM17/50 midrange units are vertically aligned on a centrally located, easily removed mid/hf pod.

The mid/hf pod assembly also acts as a phase plug providing low compression loading for the 12" bass/mid driver.

The RS5 offers premium performance as a front-of-house PA box whether flown or stacked in singles or multiples.

Horn loaded mids v non horn loaded mids.

Much issue is made over the efficiency of horn loaded mids in 'line array' cabinets. Having seen the EQ settings for the mid-band section in one design it was noted that several dB had been removed over a wide bandwidth to obtain a smooth response.

It can only be assumed that such a huge cut was necessary due to this mid-horn's design however, such a large reduction would virtually eliminate the anticipated efficiency gains of horn loading.

The RS5's mid band is inherently smooth, within 2dB over almost 3 octaves, allowing vocals to be mixed above instrument levels with comparative ease.

Touring the RS5

Versatility is the keyword with all Shermann products and the RS5 has been designed to maximise use within a wide variety of system combinations.

The RS5 was primarily designed for use with the R118B however, subsequent live gig evaluation has shown that the RS5 is not restricted to use in pairs with two or four R118B but also operates superbly in central clusters, stacked systems and flown multiples.

Standard hardware includes dual flying points & safety tie set plus a unique hinge / helping strap assembly which assists cabinet alignment during flying and stacking.

Six strategically placed handles and four rear mounted 100mm swivel castors are fitted to assist transportation, stacking and storage.

Fully tested and certificated hanging bars are available for the RS5.

Installing the RS5

The numerous advantages of fully equipped Shermann touring boxes are also available to the installer.

From a fully equipped instal model to a totally basic version with no handles and castors the RS5 may also be specified in a variety of painted finishes.

Our expertise in the installation market allows us to offer superb sounding systems which are highly efficient, cost-effective and fully compatible with our customer's requirements.

Exterior fittings

Handle (top & bottom)

Large steel recessed steel flip type

Handles (side)

Steel recessed steel bar type

Finish

Black carpet

Paint optional

Grille

Heavy duty welded mesh on steel frame c/w acoustically transparent foam and engraved logo.

Skids

Bottom mounted easily replaced 15mm plywood skids

Flying Points (supplied)

GS-CF4 side mounted track plates and rear strap/hinge plates.

Please Note: A limited number of flying studs are still available for earlier models supplied with the small MAN fitting. Call for details.

Construction

Cabinet shell

15 & 18mm multi-laminate Scandinavian birch plywood.

Baffle assembly

18mm multi-laminate Scandinavian birch plywood.

Connections

Standard input plate

Speakon NL8 x 2

Low mid - pin 2+ **hot** / pin 2- **cold**

Mid/HF - pin 3+ **hot** / pin 3 - **cold**

Input plate(option) *

Speakon NL4 x 2 plus NL8 x 1 NL4

Low mid - pin 1+ **hot** / pin 1- **cold**

Mid/HF - pin 2+ **hot** / pin 2 - **cold** NL8

Low mid - pin 2+ **hot** / pin 2- **cold**

Mid/HF - pin 3+ **hot** / pin 3 - **cold**


Sockets are parallel linked on all pins eg. 1+ to 1+ (see diagram)

Crossover frequencies

RS-5 must be used with pre-set parameters installed by Shermann and available for all XTA, BSS, Klark-Teknik, Ashly and other suitable digital loudspeaker management systems


* Options must be requested at time of ordering.

RS5

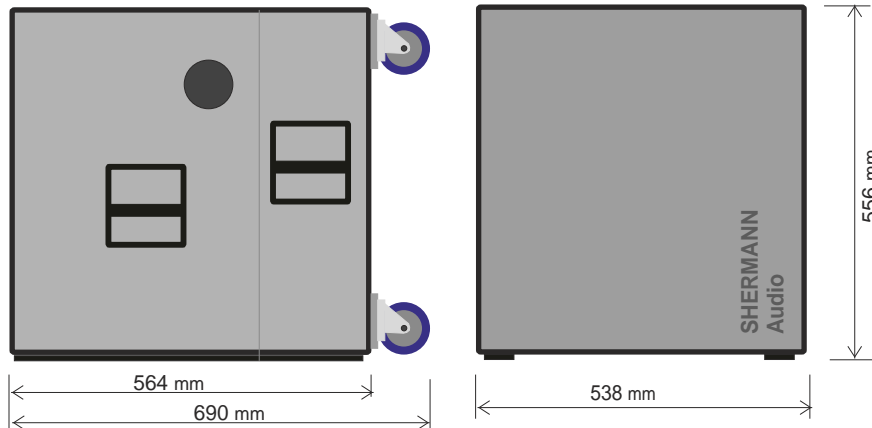

NL4/NL8 input plate

(twin NL8 plate wired to 2+ 2- & 3+ 3-)

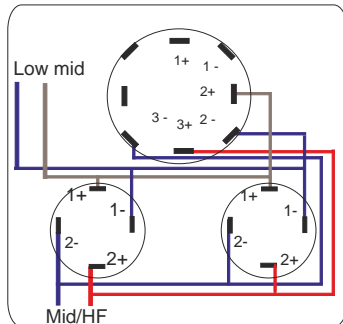

RS 5 stacked showing castor positions, standard twin NL8 input plates, safety tie points, hinge plates and a hinge assembly normally used when flying.

Speaker Cables

We recommend the use of **2.5mm²** or **4mm²** OFC cabling with all Sherman full range cabinets.

Wherever possible, cable lengths should not exceed 10 metres for 4 ohm loading (*2 x 8ohm RS5 in parallel*); cabinet link cables should not exceed 2 metres.

Please call for details on Sherman cables - contact info' shown below.

Please note

We would like to draw your attention to the likelihood of hearing damage from prolonged exposure to high sound pressure levels.

Care should be taken when using cabinets in close proximity to the audience, musicians or artists. For further information on the safe operation of any Sherman product please fax, call or email us - contact details are shown below.

Textured Protective Coating.

The coating currently applied to Sherman loudspeakers is an extremely hard wearing textured finish designed to protect the loudspeaker cabinet during normal use.

Damage may be caused through contact with sharp objects or if stacked against flight cases or any other item with metal fittings during transportation.

Whilst this style of coating is generally accepted as more durable than a paint finish it should be accepted that TPC is not armour plating and as such, may indeed be scratched or damaged.

The information within this data sheet is accurate and correct at the time of publication.

It is recommended that all technical information is verified with the company before inclusion in quotations or tender documents as The Company will not be held responsible for losses or difficulties arising from errors, changes or omissions.

Tel: +44 (0)845 644 2209 & 01686 622 997 / Email: info@shermann.com
 Fax: +44 (0)1686 623 233 / Web: www.shermann.com

All data, images & product design; © Ken Hughes 2001-2008 **Shermann** is a registered trade mark used by S.P.A. Systems Ltd

Technical Specifications

System

| | |
|-----------------------------|------------------------|
| Format | 3 way, bi-amp drive |
| Network | PCN-5 x 2 |
| Nom' impedance | 8 ohms (both sections) |
| Hi-pass filter (-3dB point) | 80Hz / 4th order |

Low mid section

| | |
|----------------------|---------------------|
| Amp' power @ 8 ohm | 300 - 450 watts rms |
| Continuous Programme | 600 watts |
| Short term peak | 1,200 watts |

Mid/HF section

| | |
|----------------------|---------------------|
| Amp' power @ 8 ohm | 200 - 350 watts rms |
| Continuous Programme | 450 watts |
| Short term peak | 900 watts |

Performance

| | |
|---------------------|-------------------|
| Sensitivity @ 1w/1m | 101 dB |
| Output (peak) | 130 (138) dB @ 1m |
| Frequency response | 60 Hz - 17.5 KHz |
| Dispersion > .5 KHz | 90° x 30° |

Drive unit - LF

| | |
|---------------------|-----------------------|
| Drive unit size | 304 mm / 12" |
| Voice coil diameter | 76 mm / 3" |
| Chassis | Cast aluminium |
| Magnet | Neodymium |
| Mounting | 6mm caphead bolts x 4 |

Drive unit - MF

| | |
|---------------------|-----------------------|
| Drive unit size | 165 mm / 6.5" |
| Voice coil diameter | 38 mm / 1.5" |
| Chassis | cast aluminium |
| Magnet | Ferrite |
| Mounting | 5mm caphead bolts x 4 |

Drive unit - HF

| | |
|---------------------|--------------------------|
| Drive unit exit | 25 mm / 1" |
| Voice coil diameter | 44 mm / 1.75" |
| Magnet | Neodymium |
| Diaphragm | titanium |
| Horn mounting | 5mm c/s socket bolts x 4 |

Dimensions

| | |
|--------------------|----------------------------------|
| Height | 556 mm (21.88") |
| Depth | 564 mm (22.20") |
| Depth over castors | 690 mm (27.25") |
| Width | 538 mm (21.20") |
| External volume | 148 lts (5.22 ft ³) |
| Weight | 43.2 Kgs (95 lbs) |

The front foam used on this cabinet is not fire retardent.



ShermannAudio

R Series