


Dx Series by Shermann

Bx115

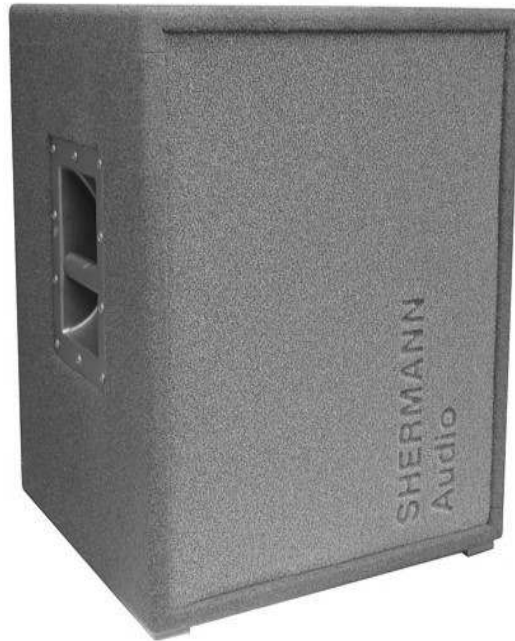

Compact, highly portable LF cabinet with a powerful 15" bass driver. Complete with top pole mount adapter and coated in our TPC finish as standard for heavy duty gigging and touring. Use with SHERMANN Audio Dx cabinets to form a cost-effective ultra-compact, powerful, high quality PA or Disco rig. Insert style handles and castors are standard fittings on this model.

Components

Filter board (where applicable)	2.4mm glass fibre / copper tracks
Capacitors	250v polypropylene (2% tolerance)
Inductors	1.25mm wire / air cored
Wiring	2.5mm multi-strand copper
HF driver	n/a
LF driver	Steel framed 15" / 3" voice coil

Connections

Speakon NL4	pin 1+ hot / pin 1- cold
Speakon NL8	pin 1+ hot / pin 1- cold

Crossover/filter frequencies

External:	High pass: -3dB @ 35Hz / 8th order
External:	Low pass: 110 Hz (within SHERMANN Audio systems)

Specifications

System

Format	Ported enclosure
Nom' impedance	8 ohm
Rec' amp' power @ 8ohm	350 - 600 watts rms
Programme power	1200 watts
Crossover - option*	n/a

Performance

Sensitivity @ 1w/1m	98 dB
Maximum output	126 dB @ 1m
Frequency response	40 Hz - 130 Hz
Dispersion (>2.5khz)	N/A

Components

Drive unit (LF)	380 mm (15")
-----------------	--------------

Dimensions

Height	654 mm
Depth	516 mm
Width	450 mm
Depth over castors (option)	641 mm
External volume	144 lts
Weight	31.8 Kgs

Mechanical

Connectors	"Speakon" NL4 x 2
(Option)	"Speakon" NL8 x 2
Castors	4 x 76mm swivel
Handles	Insert style
Stand mount (fitted)	35mm
Stand mount option*	32 or 38mm diameter
Finish	TRC or TPC
Foam Front / Welded	
Grille	Standard fitting

Please note

We would like to draw your attention to the likelihood of hearing damage from prolonged exposure to high sound pressure levels.

Care should be taken when using cabinets in close proximity to the audience, musicians or artists.

For further information on the safe operation of any Shermann Audio product please fax, call or email us - contact details are shown below.

The front foam used on this cabinet is not fire retardant.

* Options must be requested at time of ordering.



Shermann

Unit 35, Vastre Enterprise Park,
Newtown, Powys.
SY16 1DZ

Tel: +44 (0) 1686 622 997
Fax: +44 (0) 1686 623 233
Email: info@shermann.com
Web: www.shermann.com